



Leading the Future of Industrial Environmental Solutions



Distributor Contact Info.



bautai-tech.com

Factory Address:

Factory1 : No. 586, Sec. 2, Zhanghe Rd., Hemei Township, Changhua County 50550 , Taiwan (R.O.C.) | TEL : +886-4-7616-306

Factory2 : No. 98, Aly. 16, Sanyi Ln., Xiushui Township, Changhua County 504002 , Taiwan (R.O.C.) | FAX : +886-4-7617-306

# Advanced Industrial Environmental Purification Solutions

Harnessing Next-Generation Technology

- Eco-Friendly Solutions
- Continuous Recycling for a Greener Future

Oil Mist Recycling Systems

Protecting the Environment, Maximizing Efficiency

Our mission is to protect the environment; our pursuit is efficiency.

Your Challenges, Our Solutions  
Excellence in Every Detail

1 External




Eco-Friendly Protection

2 Internal



Breathe Easy, Stay Safe

- Is your production site facing issues with oil mist, smoke, or fumes?
- Struggling with oil mist and fumes in workshops and looking to create a cleaner, healthier workspace?
- Concerned about reduced component lifespan and potential safety hazards from short circuits due to particulate exposure?
- Want to meet global ESG requirements while maintaining efficient operation?

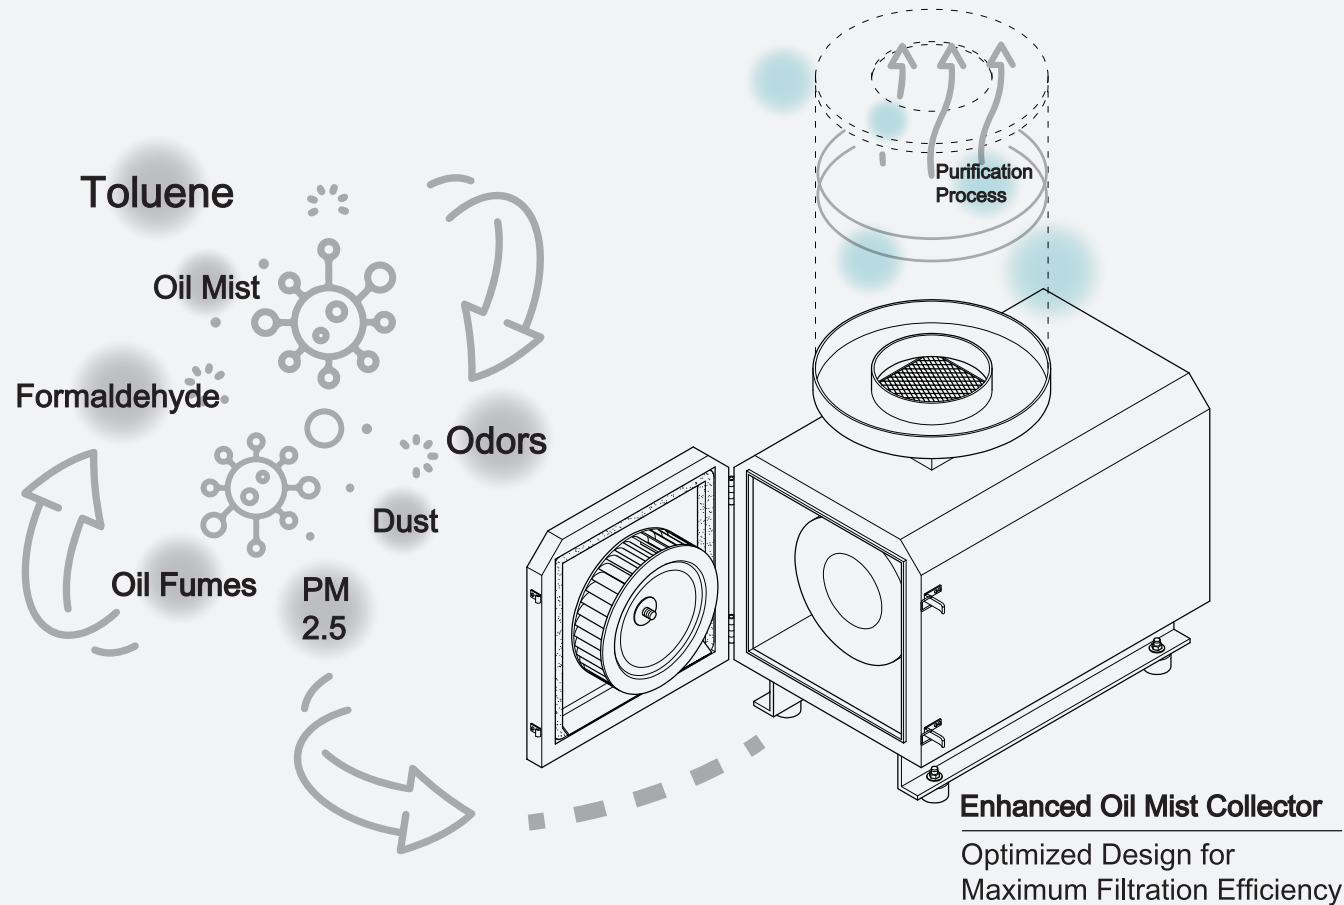

Compact Design

LC

LC1000  
LC2000

Large Airflow

Energy Efficient

LS

LS1000  
LS2000



SPECIFICATIONS

Model	LC-1000	LC-2000	LS-1000	LS-2000
Power (HP)	1/4HP(0.18KW)	1/4HP(0.18KW)	0.5HP(0.37KW)	1HP(0.75KW)
Suction Volume (m³/min)	13/15	18/22	24/29	33/41
Frequency (Hz)	50 / 60	50 / 60	50 / 60	50 / 60
Voltage (V)	1Φ 220V	3Φ 220V / 380V	3Φ 220V / 380V	3Φ 220V / 380V
Inlet Diameter (mm)	150	150	150	200
Noise Level (dB)	58	60 / 64	64 / 68	64 / 69
Weight (kg)	17	24	45	54
Dimensions (mm)	510Lx340Wx440H	630Lx300Wx470H	710Lx375Wx520H	750Lx420Wx575H

Dimensions do not include optional accessories




Vertical Purification Filter

Suitable for water-based, oil-based cutting applications

Series	L Series	S Series	H Series
Filtration Level	Light oil mist, water mist Filters down to 10 µm	Smoke, dense mist Filters down to 1 µm	Oil mist, full oil machining Filters down to 0.3 µm
Application Features	Light cutting Suitable for water mist and minimal oil mist environments	Heavy cutting Suitable for dense smoke and mist environments	Full oil machining, air-conditioned plants. Suitable for environments with strict air quality requirements. Hepa H13 grade, 99.97% efficiency.

# LS

## Cross-Section Diagram

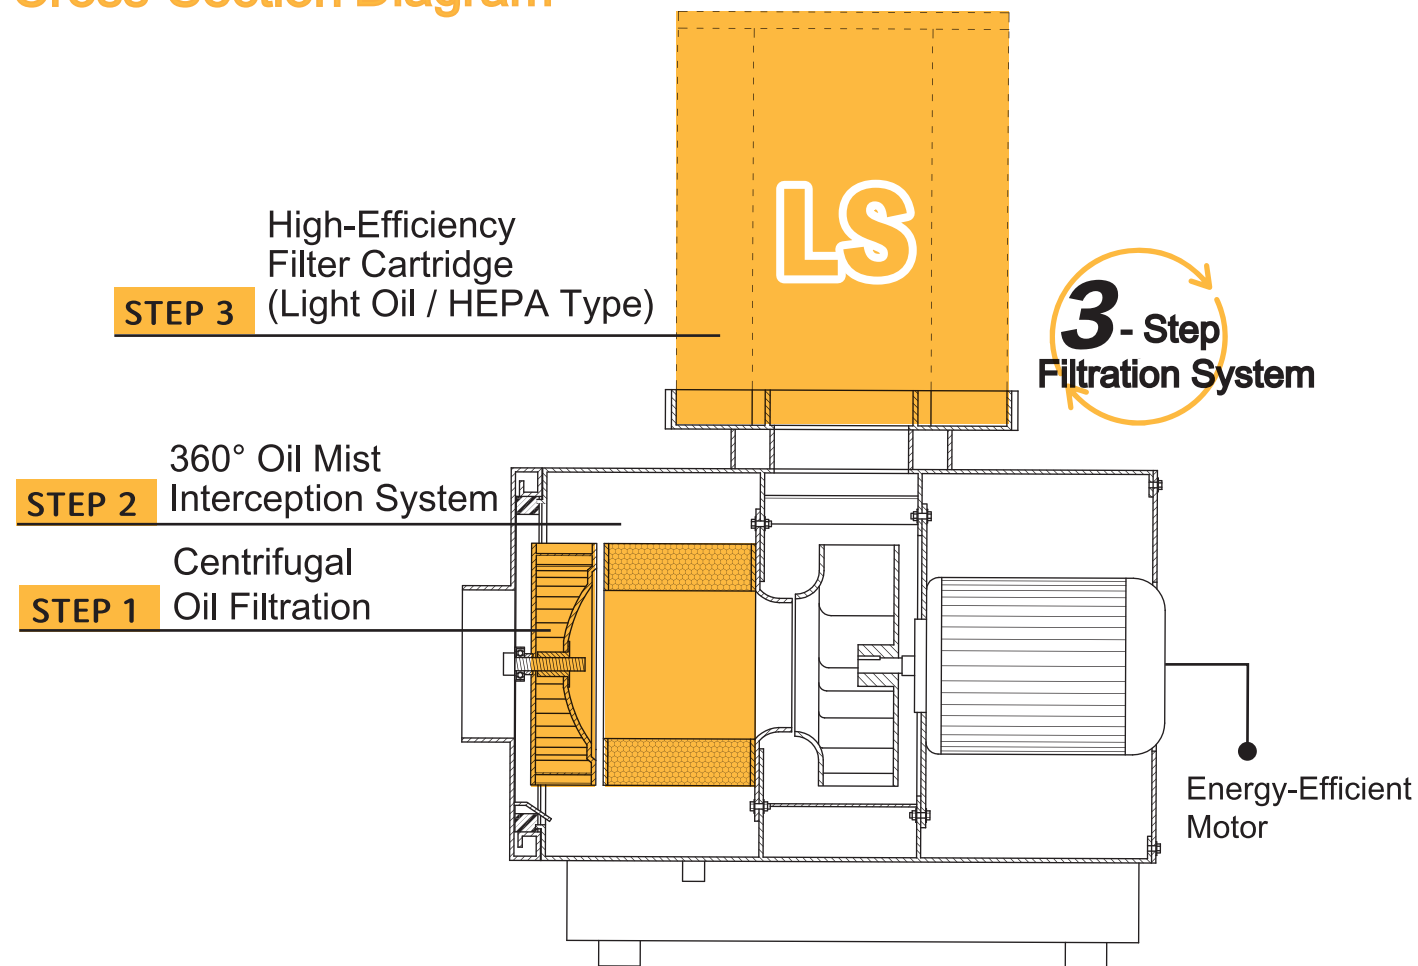


## LS Series

### Features


- High airflow with low power consumption
- Centrifugal impact design
- Optimized efficiency
- Extended maintenance intervals
- Energy-saving with reduced carbon emissions

Aligned with ESG principles for sustainable environmental management

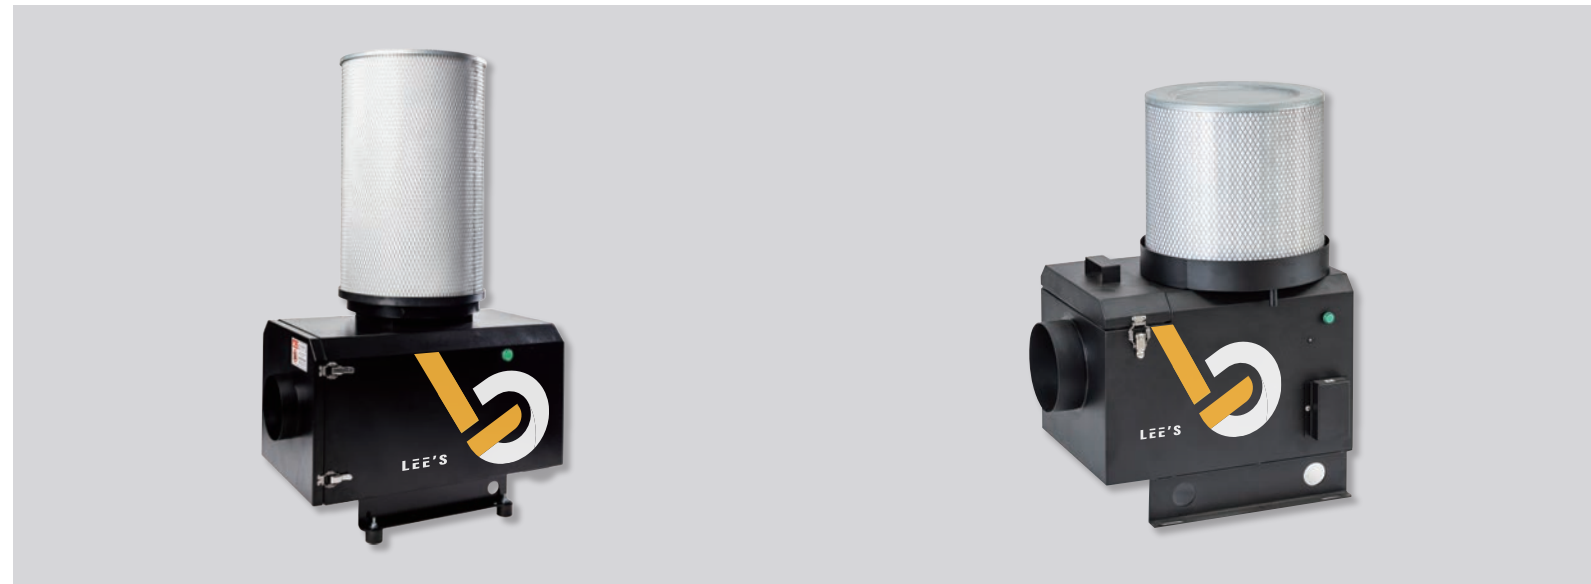

# LC

## Cross-Section Diagram

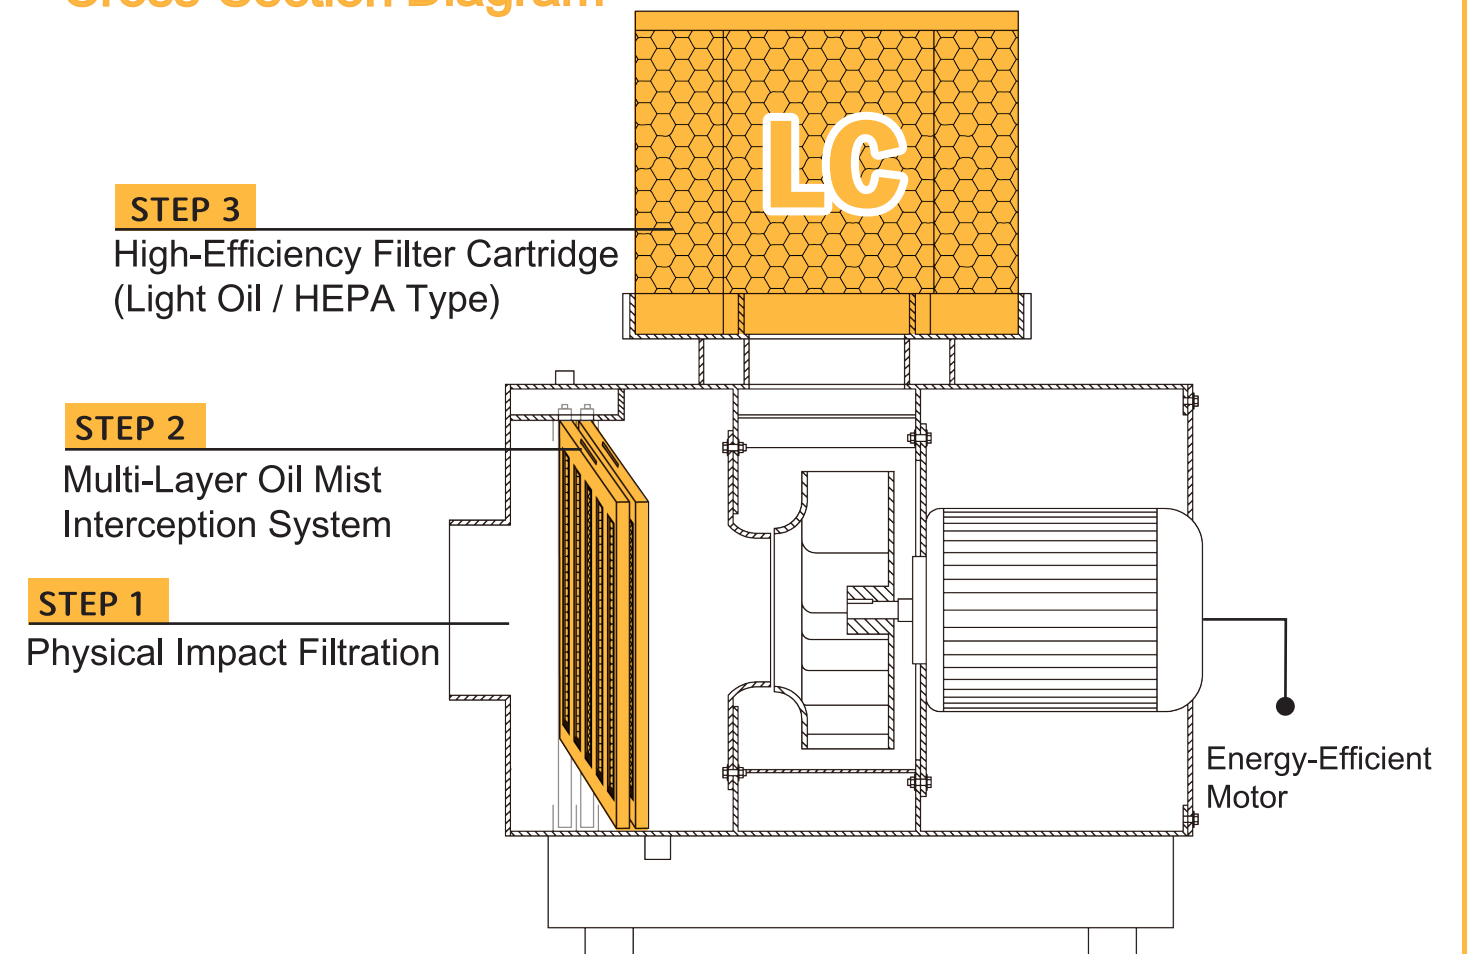

## LC Series

### Features

- Inertial impact principle
- Simple and convenient maintenance
- S-type patented filtration
- Energy-saving with low carbon emissions

Aligned with ESG principles for sustainable environmental management

## Filtration Accessories



Stainless Steel Functional Filter Mesh



360° Stainless Steel Cylindrical Filter Core

## Optional Accessories



Fixed Steel Stand



Mobile Steel Stand



# Chip / Sludge Filter

## Applications

To filter and remove metal chips and sludge that settle in the coolant tank during machining processes, increasing tank capacity and preventing blockages or deterioration.

## Key Features

- ▶ Patented pressure stabilizer prevents splashing
- ▶ Exclusive vacuum test for superior suction
- ▶ Protects pump, extends lifespan
- ▶ Operator-friendly, easy, and time-saving
- ▶ Enlarged filter tank capacity



## SPECIFICATIONS

Model	LG-F160	LG-F400
Weight (kg)	45	65
Max. Flow Rate (L/Min)	42gpm(159L/Min)	100gpm(378.5L/Min)
Filter Capacity	12L	19L
Filtration Accuracy	<b>Standard</b> 1mm <b>Optional</b> 0.38mm (40 mesh) 0.25mm (60 mesh)	
Inlet Pipe Diameter	32mm	
Coolant Return Device	Patented Coolant Pressure Stabilizer	
Dimensions (mm)	680Lx390Wx850H	750Lx410Wx900H

Customizable based on specific needs

Dimensions do not include optional accessories.

# Oil-Water Separator

## Applications

Separates cutting oil and lubricants from the machine's coolant tank. Waste oil is discharged, and purified coolant is recirculated.

## Key Features

- ▶ No leveling needed, ready for immediate use
- ▶ Built-in dual-layer oil skimming system
- ▶ Easy installation, simple operation
- ▶ Prolongs cutting fluid lifespan
- ▶ Enhanced safety with pneumatic drive
- ▶ Zero consumables, eco-friendly



## SPECIFICATIONS

Model	LW-S20	LW-M15
Max. Flow Rate (L/Min)	32L/Min	32L/Min
Coolant Tank Capacity	13L	9L
Pneumatic Air Pressure	0.4-5Kg	0.4-5Kg
Structural Design	Enhanced four-layer separation efficiency	Three-layer separation
Installation	Base with wheels and handle, no leveling needed	One-to-one use, pre-drilled mounting interface
Suction Unit	Floating design with adjustable water level and magnetic base for securing pipe position	
Filtration Unit	Pressure regulator with manual speed control and automatic drainage	
Oil Discharge Level	Adjustable oil discharge level. Reduces water content	
Water Level	Adjustable water level and density ratio	
Dimensions (mm)	450Lx300Wx810H	450Lx320Wx335H
Weight (kg)	30	20

Dimensions do not include optional accessories.

Your Top Choice for  
Industrial Environmental  
Protection

Cleanroom and Production  
Line Purification Experts

**LOB & LOD Series**  
High-Performance Centralized  
Dust Collection and Purification  
System



**Advanced  
Purification Technology**



Innovative washable  
filter design extends  
cartridge life. Regular  
maintenance maximizes  
efficiency and supports  
zero-carbon purification goals.



**Applicable Industries**

- 01 Electric Vehicles
  - 02 Semiconductors
  - 03 Machine Tools
  - 04 Aerospace
  - 05 Specialized Piping Engineering
- (Customizable for all industry sectors)

Eliminating oil,  
smoke, mist, and dust  
from manufacturing  
processes to create  
the optimal working  
environment for you.



**Product Highlights**

- 1 Compatible with all machine tools
- 2 Built for large machine tools and heavy oil mist environments
- 3 Flexible line-up: one-to-one or one-to-multiple
- 4 Works with wet and dry machining conditions
- 5 Powerful suction, low noise, minimal vibration
- 6 Patented multi-stage filtration technology

**Top-Tier Service**

- 1 Expert consultation and full air purification planning
- 2 Tailored solutions to meet customer needs

# Industrial-Strength Air Purifier



**Powerful Suction**  
Boosts air exchange and ensures continuous purification.




**Precision Filtration**  
Efficiently captures oil mist, metal fumes, and PM2.5, with 99% filtration.



**Extended Maintenance Cycle**  
Washable filters cut costs and simplify cleaning.



**Eco-Friendly**  
Optimizes performance, cuts energy use, and lowers carbon footprint.

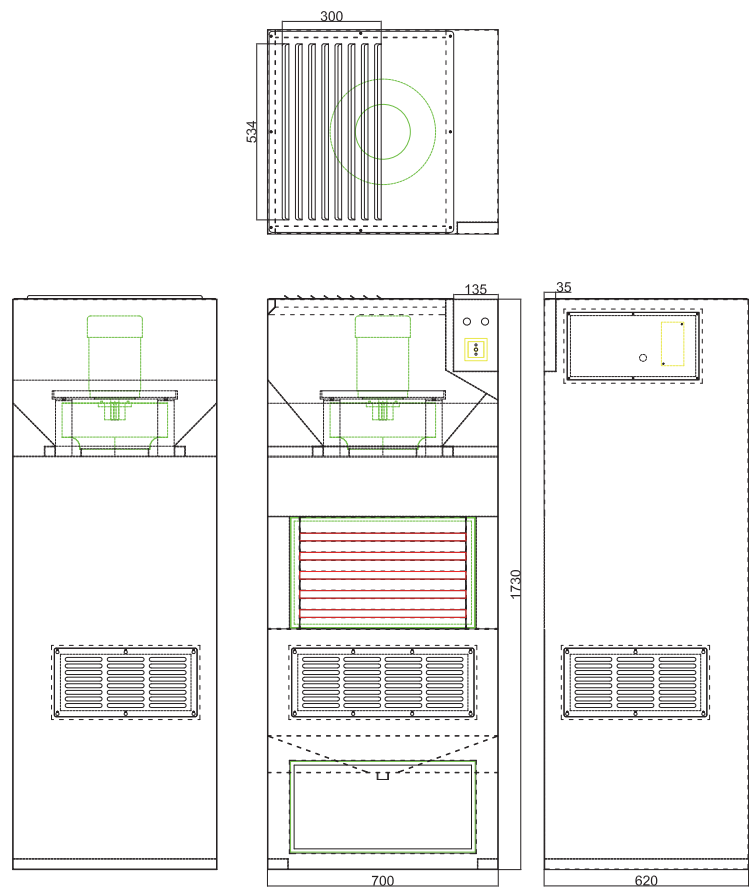

Air Purifier  
Cross-Section Diagram


SPECIFICATIONS	
Model	LA-2000
Power (HP)	2HP(1.5W)
Frequency (Hz)	60 / 50
Voltage (V)	3Φ 220V / 380V
Airflow (m³/h)	2400
Dimensions (mm)	700L x 620W x 1730H
Customizable according to specific needs	

Dimensions do not include optional accessories

# Versatile Centralized Dust Collection & Purification System

Leadership · Eco Purification · Energy Saving · Solution

**All-in-One Dust Collection and Air Purification**  
(Featuring LOB & LOD Series)

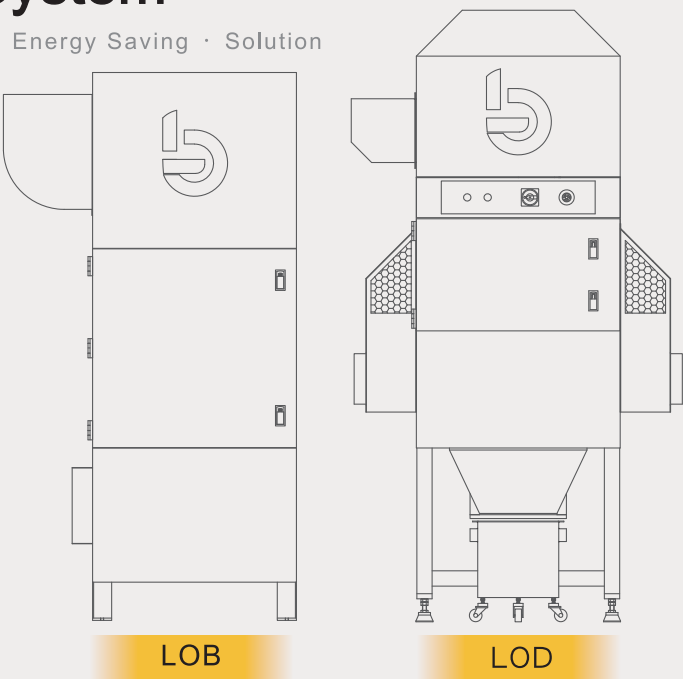

Oil Mist Recovery System - LOB Series Specifications

Model	LOB-45	LOB-80	LOB-120
Power (HP)	2HP(1.5KW)	3HP(2.25KW)	4.5HP(3.375KW)
Suction Volume (m³/min)	80	130	200
Frequency (Hz)	50/60	50/60	50/60
Voltage (V)	3Φ 220V	3Φ 220V	3Φ 220V
Inlet Diameter (mm)	300x1 PCS	300x2 PCS	300x3 PCS
Noise Level (dB)	75	75	75
Weight (kg)	290	550	730
Dimensions (mm)	800Lx800Wx2150H	1100Lx1300Wx2700H	1150Lx1800Wx2700H

Fume Recovery System - LOD Series Specifications

Model	LOD-45	LOD-80	LOD-120
Power (HP)	2HP(1.5KW)	3HP(2.25KW)	4.5HP(3.375KW)
Frequency (Hz)	50/60	50/60	50/60
Voltage (V)	3Φ 220V	3Φ 220V	3Φ 220V
Inlet Diameter (mm)	200x2 PCS	200x2 PCS	200x2 PCS
Speed (R.P.M)	1750	1750	1750
Noise Level (dB)	75	75	75
Dimensions (mm)	800Lx900Wx2375H	1100Lx1300Wx2550H	1150Lx1800Wx2700H

※ 1HP = 0.75KW    ※ Voltage can be customized